


PPB-2 Sprievodca inštaláciou


ŠPECIFIKÁCIA:

Aplikácia	Na vnútorné použitie
Inštalácia	Vertikálna montáž na stenu
Prevádzková teplota	-20°C~+50°C
Rozmery	85mm*60.5mm*40.0mm




1. Párovanie tlačidla s elektronikou (CUW-24S)

1. Stlačte tlačidlo RF-Learn na ovládacom paneli (obr. 1) toľkokrát, koľkokrát zodpovedá požadované mu príkazu, podľa nasledujúcej tabuľky: Do 10s stlačte tlačidlo.

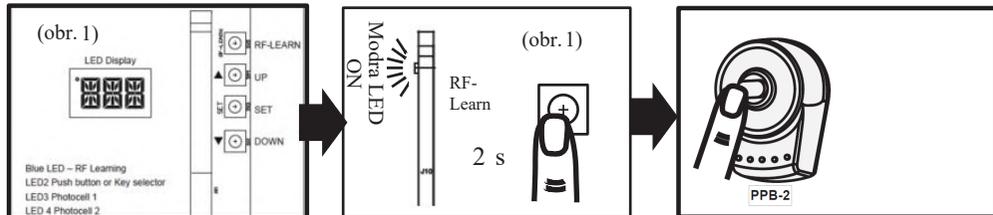

	Príkaz	Display
1 x	Otvor-Stop-Zatvor	"OSC"
2 x	Otvorenie pre peších	"PED"

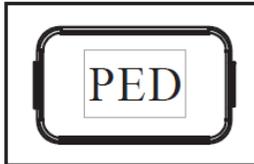


(obr 2)

2. Uistite sa, že LED displej zobrazuje "OSC" alebo "PED".

Kód zodpovedá vybranému príkazu

2. Párovanie tlačidla s elektronikou (CUD-3S/40 CUD-3S/80)


1). Zapamätanie tlačidla: Stlačte tlačidlo „RF Learn“ na 2 sekundy a LED3 sa rozsvieti; potom stlačte tlačidlo; LED3 dvakrát zabliká a potom zhasne. Učenie tlačidla je dokončené.

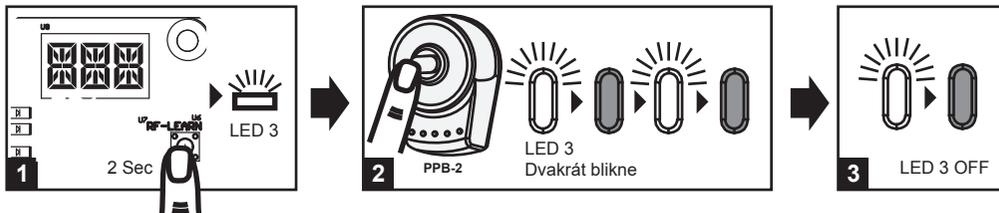

PPB-2 Instalation manual

SPECIFICATION:


Aplication	Indoor use only
Instalation	Vertical mount
Operating temp.	-20°C~+50°C
Dimensions	85mm*60.5mm*40.0mm




1. Pairing with CUW-24S drive electronic

Press the RF-Learn button on the control panel (Fig. 1) as many times as corresponds to the desired command, according to the table.

Within 10 seconds, press the button on the transmitter.

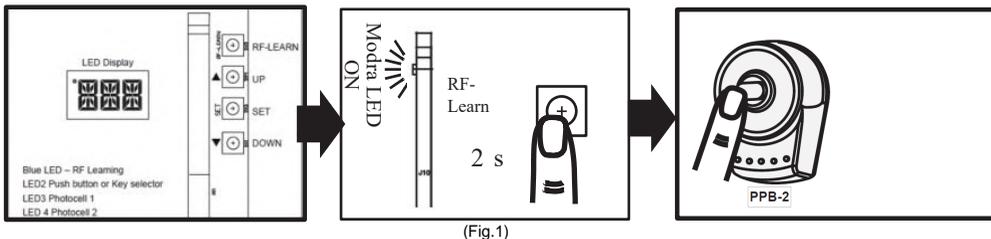

	Command	Display
1x	Open - Stop - Close	"OSC"
2x	Partial open	"PED"

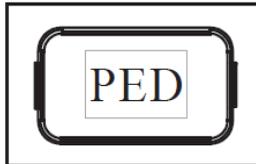

2. Make sure the LED display shows the selected command code "OSC" or "PED".

2. Pairing with drive electronic CUD-3S/40 CUD-3S/80

Press the RF-LEARN button for 2 seconds until LED3 lights up.
Then press the transmitter button, LED3 flashes twice and then goes out.
Learning is complete.

